



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :

H04B 7/26, H04Q 7/04

A1

(11) International Publication Number:

WO 94/08406

(43) International Publication Date:

14 April 1994 (14.04.94)

(21) International Application Number: PCT/FI93/00399

(22) International Filing Date: 6 October 1993 (06.10.93)

(30) Priority data:

924506

6 October 1992 (06.10.92)

FI

(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puistotie 1, FIN-02600 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): TUOHINO, Markku [FI/FI]; Koivusyrjä 25F, FIN-02130 Espoo (FI).

(74) Agent: OY KOLSTER AB; Stora Robertsgatan 23, P.O. Box 148, FIN-00121 Helsinki (FI).

(81) Designated States: AU, JP, NO, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

With international search report.

(54) Title: CELLULAR RADIO NETWORK AND METHODS FOR UPDATING LOCATION AND SETTING UP A CALL IN A CELLULAR RADIO NETWORK

(57) Abstract

A cellular radio network, and methods for updating location and setting up a call in a cellular radio network. The network comprises at least one mobile subsystem (10), which serves conventional mobile stations (MS). The network knows the location of the subsystem (10) and the mobile stations (MS) with an accuracy of a location area. The location data of a mobile station registered in the subsystem is the identification data of the subsystem, which is not updated again until the radio station leaves the subsystem. In the call set-up, a two-stage interrogation is conducted: first, the identifier of the subsystem is obtained as the location data of the mobile station; second, the current location of the subsystem where the call will be routed to is obtained by means of said identifier of the subsystem.

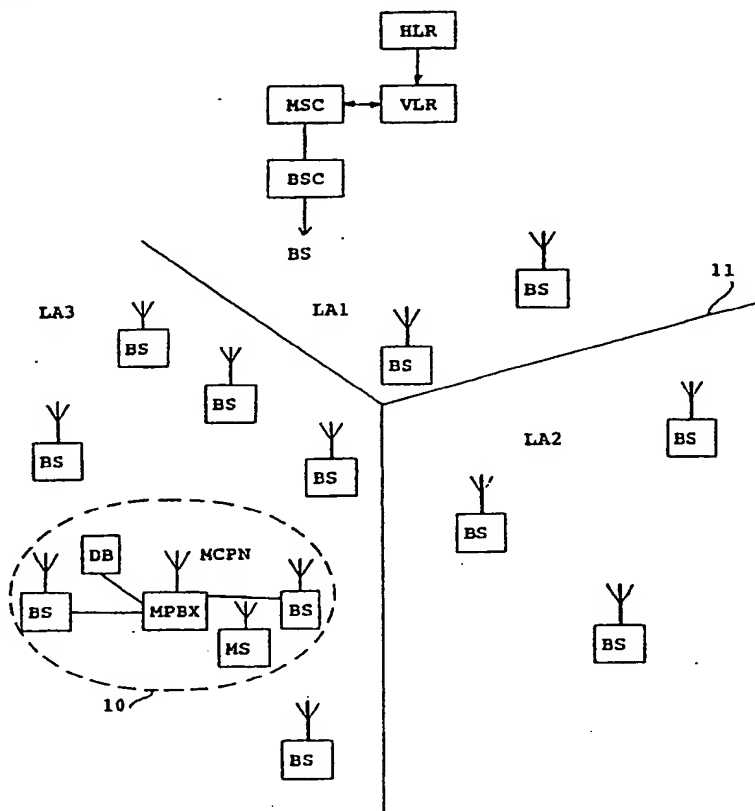

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TC	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

BEST AVAILABLE COPY

Cellular radio network and methods for updating location and setting up a call in a cellular radio network

Field of the Invention

5 The invention relates to a cellular radio network comprising mobile stations capable of roaming within the cellular radio network in such a manner that location data of the mobile stations is stored in the cellular radio network with an accuracy of a location
10 area, consisting of one or more cells, and at least one mobile subsystem capable of roaming within the cellular radio network and serving said mobile stations.

Background of the Invention

15 In a cellular radio network, base stations continuously broadcast information about themselves and their environment. Such information may include, for example, a location area identifier, base station identifier, base station type, and so-called neigh-
20 bouring cell information. When a mobile station is registered in the base station of a certain cell, it monitors the quality of the transmission of the neighbouring base stations and changes to one of these neighbouring base stations if the quality of the transmission
25 of the present base station becomes low enough. A cellular radio network must usually have information on the roaming of a mobile station within the network radio coverage area with an accuracy of a so-called location area, which comprises a suitable number of predetermined
30 cells and their base stations. In connection with the updating of the location of a mobile station, the identifier of this location area will be stored in the subscriber data bases in the network. The location data of the subscriber indicates thus a physical and geo-
35 graphical area within the radio coverage area of the

cellular radio network. The location area information broadcasted by a base station informs a mobile station of the location area to which the base station belongs. When the mobile station moves to another cell within the same location area, location updating to the cellular radio network is not needed, i.e. the location data does not change. However, when the mobile station, on the basis of location area information, observes that the location area changes with the new base station, it starts location updating by sending a location updating request to the cellular radio network. As a result of this location updating request, the cellular radio network updates the location data of the subscriber with the identifier of the new location area.

The system described above operates well in a conventional network. In the future, however, a fixed cellular radio network area may comprise mobile radio exchanges or systems disposed e.g. on trains, ships or possibly even aeroplanes to serve mobile stations used by passengers. Such systems are also called MCPNs (Mobile Customer Premises Networks). When such a mobile system moves, for instance on a train, from one physical location area to another in a fixed cellular radio network, a large number of mobile stations registered in the mobile radio system effect location updating to the cellular radio network. This leads to a considerable signalling load in the cellular radio network.

Finnish Patent Application No. 913 217 discloses location updating when a DECT (Digital European Cordless Telecommunications) system, whose subscribers are also subscribers of the GSM system, roams in a GSM cellular system. When the DECT system roams from one GSM location area to another, a complicated procedure is followed to update in the GSM network the location data

of all subscribers registered in the DECT system, which causes a considerable signalling load.

Disclosure of the Invention

5 An object of the present invention is to reduce the signalling load in a cellular radio network when a mobile radio system together with mobile stations registered in it roams from one location area to another within the radio network.

10 This is achieved with a cellular radio network comprising mobile stations capable of roaming within the cellular radio network in such a manner that location data of the mobile stations is stored in the cellular radio network with an accuracy of a location area, consisting of one or more cells, and at least one mobile subsystem capable of roaming within the cellular radio network and serving said mobile stations, characterized in that location data of said at least one mobile subsystem is stored in the cellular radio network with an accuracy of a location area, and identification data of said mobile subsystem is stored in the cellular radio network as the location data of a mobile station registered in said mobile subsystem.

20 A further aspect of the invention is a method for updating location in a cellular radio network comprising mobile stations capable of roaming within the cellular radio network in such a manner that the location of the mobile stations is known with an accuracy of a location area, consisting of one or more cells, and at least one mobile subsystem capable of roaming within the cellular radio network and serving said mobile stations, in which method the updating of the location of a mobile station is started whenever the mobile station enters a new location area within the cellular radio network. The method of the invention is charac-

25

30

35

terized in that the location of a radio station entering said at least one mobile subsystem is updated, whereby the cellular network stores the identification data of said mobile subsystem as the location data of said mobile station, and when said at least one mobile subsystem and the mobile stations registered in it enter a new location area within the cellular radio network, only the location of said one mobile subsystem is updated.

Yet another aspect of the invention is a method for setting up a call in a cellular radio network comprising mobile stations capable of roaming within the cellular radio network in such a manner that the location of the mobile stations is known with an accuracy of a location area, consisting of one or more cells, and at least one mobile subsystem capable of roaming within the cellular radio network and serving said mobile stations, in which method a call to a mobile station is routed by means of the location data stored in the cellular radio network. The method according to the invention for setting up a call is characterized in that a call to a mobile station registered in the mobile subsystem is routed as follows:

the location data of the mobile station stored in the cellular radio network is interrogated, said location data being the identifier of the mobile subsystem,

the location data which corresponds to said subsystem identifier and is stored in the cellular radio network is interrogated,

the call is routed to the subsystem and further to the mobile station by means of the location data of the subsystem.

The invention provides a more flexible way for mobile radio systems to deal with location area data by

defining a so-called logical location area, which does not indicate a physical and geographical location area but refers to mobile systems possibly capable of handling a fairly large number of subscribers. When a mobile station moves to a mobile system (e.g. a train), it effects location updating to the mobile system, which in turn transmits this data to the fixed cellular radio network, which stores the logical location area, i.e. the identification data of the mobile system, as the subscriber data of the mobile station. When the mobile system moves from one physical location area to another in the fixed cellular radio network, the location data of the mobile system is updated in the cellular radio network. It is not necessary to update the location data of the mobile stations registered in the mobile system, as they are still located within the same logical location area (in the mobile system), which is indicated by the identification data of the mobile system, included in their subscriber data. In other words, the logical location area data does not change in the subscriber data contained in the cellular radio network even though the logical location area itself roams from one radio coverage area to another. By means of the invention, the signalling load of a radio network is reduced considerably, as it is not necessary for mobile stations to effect location updating. The location data of mobile stations are not updated until the mobile stations leave the mobile system.

As distinct from the previous systems, the call set-up is effected in two steps: the location data of the mobile station is at first searched for the mobile system identifier, by means of which the location necessary for the actual routing of the call can then be obtained from the location data of the mobile radio system.

Brief Description of the Drawings

In the following, the invention will be described in more detail by way of example with reference to the accompanying drawing, in which Figure 1
5 illustrates a cellular radio network of the invention.

Preferred Embodiments of the Invention

The present invention may be applied to any cellular radio system, such as the digital GSM mobile
10 phone system, NMT (Nordic Mobile Telephone), DCT1800, PCN (Personal Communication Network), UMC (Universal Mobile Communication), UMTS (Universal Mobile Telecommunication System), etc.

As is well known, the geographical area covered
15 by a cellular radio network is divided into separate smaller radio areas called cells. When a mobile station MS is located within a cell, it communicates with the network through a fixed radio station, or base station BS, located in the radio cell. The mobile stations MS
20 belonging to the system may roam freely within the area of the system from one cell to another. A cellular radio network must, however, have information on the location of a mobile station MS in order to be able to route incoming calls to the MS or page this for some other
25 reason. Typically a cellular radio network knows the location of an MS with an accuracy of an area formed by one or more cells, which is usually called a location area.

Base stations of a cellular radio network
30 broadcast continuously information on themselves and their environment, e.g. a location area identifier LAI, base station identifier BSI, base station type identifier BSTI, and so-called neighbouring cell information. On the basis of the location area identifier broadcasted
35 by the BS, an MS registered in the cell knows which

location area the BS belongs to. If the MS observes that the location area identifier LAI changes when the base station BS is changed, i.e. that the location area changes, the MS starts location updating by sending a location updating request to the cellular radio network. If the location area does not change, the MS does not effect location updating.

On account of location updating, the subscriber data of the MS concerned is updated in the subscriber databases of the cellular radio network. In the GSM system, for example, the cellular radio network comprises at least a home location register HLR, visitor location registers VLR, mobile switching centres (mobile exchanges) MSC and base station controllers BSC connected to base stations BS of the network. The location area data of a subscriber is stored in visitor location registers VLR, of which there are typically one per each mobile switching centre, whereas the HLR knows which VLR area the subscriber is visiting. The structure and operation of the GSM system are described more closely in the GSM specification as well as in *The GSM System for Mobile Communications* by M. Mouly & M-B. Pautet, Palaiseau, France, ISBN 2-9507190-0-7. As distinct from the centralized database structure described above, a cellular radio system may also have a distributed database structure.

Figure 1 illustrates a cellular radio network of the invention, said network comprising a so-called fixed primary network and a mobile radio system 10.

The fixed primary network may be a conventional mobile radio network in which the cells (not shown) formed by the radio coverage areas of base stations BS are grouped so as to form geographical or physical location areas LA1, LA2 and LA3, which in Figure 1 are separated by line 11. If a GSM network, for example, is

concerned, the visitor location register VLR may store the identifier of the location area LA whose area the mobile station MS is visiting in the location data of the MS.

5 The mobile radio system 10 may be any mobile radio system capable of serving subscribers of a cellular radio network, for example the mobile CPN system MCPN (Mobile Customer Premises Network) disposed in a vehicle such as a train, ship, car or aeroplane.
10 According to the embodiment shown in Figure 1, the MCPN comprises a mobile radio exchange MPBX, which is connected to base stations BS and a database DB. The base stations BS communicate with the mobile stations MS in the same way as elsewhere in the network and have
15 thus preferably a similar structure as the base stations in the primary network. The radio exchange MPBX comprises radio equipment, preferably multichannel equipment, with which it may be in radio connection with the base stations BS of the primary network as if it were
20 a mobile station MS. In the simplest configuration the mobile system MCPN could be merely a mobile repeater between a base station BS in the fixed cellular radio network and an MS in the mobile system.

 Functioning as a mere repeater of this kind
25 has, however, the drawback that when the mobile system MCPN moves for instance from one physical location area LA3 to another physical location area LA2, the location area data transmitted by the MCPN changes with the location area. As a result of this, all mobile stations MS
30 registered in the MCPN effect location updating to the fixed cellular radio network, which causes a significant signalling load.

 In the present invention this has been solved in such a manner that the MCPN broadcasts a unique
35 location area identifier to the mobile stations

5 registered in it. This unique identifier is independent
of the location area identifier of the physical location
area LA concerned. In its subscriber registers the fixed
cellular radio network also maintains the location data
10 of the mobile system MCPN with an accuracy of a location
area LA. In addition, in a cellular radio network a
mobile system MCPN is treated as a so-called logical
location area, which is used in the location data of the
mobile stations registered in the MCPN. When a MS moves
15 to a mobile system MCPN (located e.g. on a train), the
MS effects location updating to the MCPN. The MCPN, in
turn, transmits the information on the location of the
MS to the fixed cellular radio network, which stores the
corresponding logical location area, i.e. identification
20 data of the MCPN, as the location data of the MS. When
the MCPN moves from the location area LA3 of the fixed
cellular network to the location area LA2, the MCPN
effects location updating to the cellular radio network,
which updates the location area LA2 as the new location
25 included in the location data of the MCPN. The mobile
stations MS registered in the MCPN do not, however,
observe that the physical location area changes, as they
are still registered in the logical location area
defined by the MCPN. The cellular radio network has
30 information on the new location of the mobile stations
MS, as the location data contained therein include the
identification data of the MCPN, and the fixed network
knows that the MCPN is located within the location area
LA2. The "mobile logical location area" used in the
invention reduces thus the signalling load of the net-
work to a great extent.

The mobile system MCPN comprises a subscriber
database DB, in which the MCPN stores data of the mobile
stations MS registered in the system. When the MCPN
35 observes a call sent by a base station BS of the

cellular radio network and directed to a MS registered in it, it can thus transmit the call further to the MS concerned and transmit the reply of the MS to the BS of the fixed network.

5 In the following, the setting up of a call terminating at a mobile station MS registered in the MCPN will be described using the GSM system as an example. An incoming call causes at first an interrogation in the home location register HLR of the MS concerned, just like in conventional call set-up. In the
10 invention, the location data of the MS in the HLR is, however, the identifier of the MCPN, e.g. MSISDN, as the MS is registered in the MCPN. Another interrogation is conducted by means of the identifier MSISDN of the MCPN
15 in the home location register HLR of the MCPN to find out the visitor location register VLR within the area of which the MCPN is located at that particular moment. Thereafter the HLR requests routing information in the normal manner from this VLR to route the call to the
20 mobile switching centre MSC within the area of which the MCPN is located. The call is routed to the MSC, which effects paging of the mobile station MS within the location area, e.g. LA3, given by the VLR. When the MCPN observes paging of a mobile station MS registered
25 therein, it pages the MS concerned through the base stations BS of its own. After having received a reply, the MCPN transmits it further to a base station BS of the fixed radio network. A GSM radio and speech connection is established thereafter in a standard way
30 both between the radio exchange MPBX of the MCPN and the base station BS of the fixed network and between the base station BS of the MCPN and the called MS.

 The figure and the associated description are intended merely to illustrate the present invention. In
35 its details the present cellular radio system, method

11

for updating location and method for setting up a call
may vary within the scope of the attached claims.

Claims:

1. A cellular radio network comprising
mobile stations capable of roaming within the
5 cellular radio network in such a manner that location
data of the mobile stations is stored in the cellular
radio network with an accuracy of a location area, con-
sisting of one or more cells, and
at least one mobile subsystem capable of
10 roaming within the cellular radio network and serving
said mobile stations, c h a r a c t e r i z e d in that
location data of said at least one mobile
subsystem is stored in the cellular radio network with
an accuracy of a location area, and
15 identification data of said mobile subsystem is
stored in the cellular radio network as the location
data of a mobile station registered in said mobile
subsystem.
2. A cellular radio network according to claim
20 1, c h a r a c t e r i z e d in that said at least one
mobile subsystem comprises a local radio system which
is disposed in a mobile vehicle, such as a train, ship
or car, and which comprises means for communicating with
base stations of the cellular radio network over a radio
25 path, and means for communicating with mobile stations
over a radio path.
3. A cellular radio network according to claim
1 or 2, c h a r a c t e r i z e d in that said mobile
subsystem comprises a mobile subscriber exchange.
- 30 4. A method for updating location in a cellular
radio network comprising mobile stations capable of
roaming within the cellular radio network in such a
manner that the location of the mobile stations is known
with an accuracy of a location area, consisting of one
35 or more cells, and at least one mobile subsystem capable

of roaming within the cellular radio network and serving said mobile stations, in which method the updating of the location of a mobile station is started whenever the mobile station enters a new location area within the cellular radio network, c h a r a c t e r i z e d in that

the location of a radio station entering said at least one mobile subsystem is updated, whereby the cellular network stores the identification data of said mobile subsystem as the location data of said mobile station, and

when said at least one mobile subsystem and the mobile stations registered in it enters a new location area within the cellular radio network, only the location of said one mobile subsystem is updated.

5. A method according to claim 4, c h a r a c t e r i z e d in that the location data of a mobile station stored in the cellular radio network is not updated again until said mobile station leaves said mobile subsystem.

6. A method for setting up a call in a cellular radio network comprising mobile stations capable of roaming within the cellular radio network in such a manner that the location of the mobile stations is known with an accuracy of a location area, consisting of one or more cells, and at least one mobile subsystem capable of roaming within the cellular radio network and serving said mobile stations, in which method a call to a mobile station is routed by means of the location data stored in the cellular radio network, c h a r a c t e r i z e d in that a call to a mobile station registered in the mobile subsystem is routed as follows:

the location data of the mobile station stored in the cellular radio network is interrogated, said location data being the identifier of the mobile subsystem,

14

the location data which corresponds to said subsystem identifier and is stored in the cellular radio network is interrogated,

5 the call is routed to the subsystem and further to the mobile station by means of the location data of the subsystem.

1/1

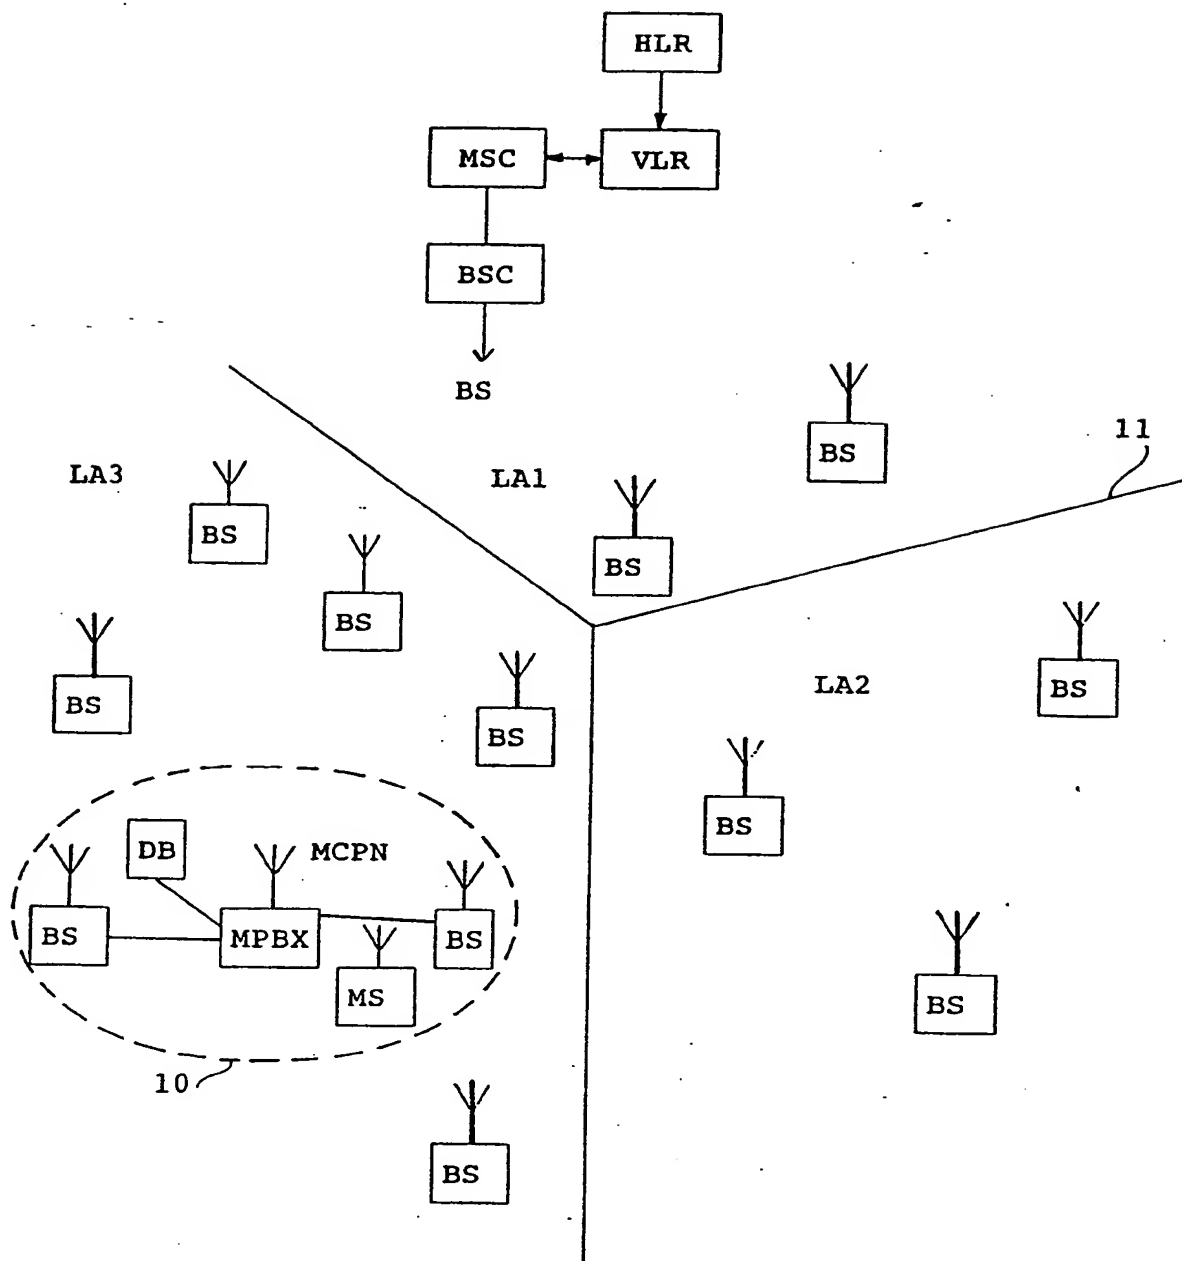


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 93/00399

A. CLASSIFICATION OF SUBJECT MATTER

IPC5: H04B 7/26, H04Q 7/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: H04B, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG: CLAIMS, WPI, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4399330 (ROLAND KUENZEL), 16 August 1983 (16.08.83), column 1, line 1 - column 2, line 10, figures 1-4 --	1-6
A	Telecom report international, 15 (1992) No. 3-4 (May-August), pp 18-21, Dr. Heinrich Armbrüster, "Third generation mobile communications"; see page 20 and figure 3. -- -----	1-6

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

28 December 1993

Date of mailing of the international search report

12 -01- 1994

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Michael Felhendler
Telephone No. +46 8 782 25 00

Information on patent family members

International application No.

PCT/FI 93/00399

Form PCT/ISA/210 (patent family annex) (July 1992)

BEST AVAILABLE COPY